

# Flo Bedside



Design: Foster + Partners, 2011



LED light for bedside, in varnish coated aluminium and steel. Its head rotates by 300° for direct lighting, the arm pivots on base by 120°. 3W-LED which you can switch on with one click for full light intensity, with two clicks for half light intensity.

## Finishing

### Standard



Black soft touch  
cod. 95001ST00



Matt white  
cod. 95002OP00



Brushed nickel  
cod. 9504400

### Special



Matt red  
cod. 95003OP00



Matt yellow  
cod. 95005OP00



Metallic bronze  
cod. 95029MT00



Gunmetal  
cod. 9503200

All RAL coating and galvanic finishes available upon request

## Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 270 lm
- Emitted flux: 150 lm
- Efficacy: 30 lm/W
- CCT: 3000K
- CRI index: >90
- LLMF: 50000 h L70

## Electrical Facts



- Source power: 3 W
- Power absorption: 5 W
- Stand-by absorption: < 1 W
- Grid voltage: 100 – 240 V AC / 50-60 Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: internal push dimmer
- Energy class: A++

## Technical data

- Environment: indoor
- Placement: table
- Net weight: 1,65 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

Packaging  
cardboard box  
46 x 40 x 8 (cm)  
0,013 m<sup>3</sup>

Gross weight  
2,4 Kg

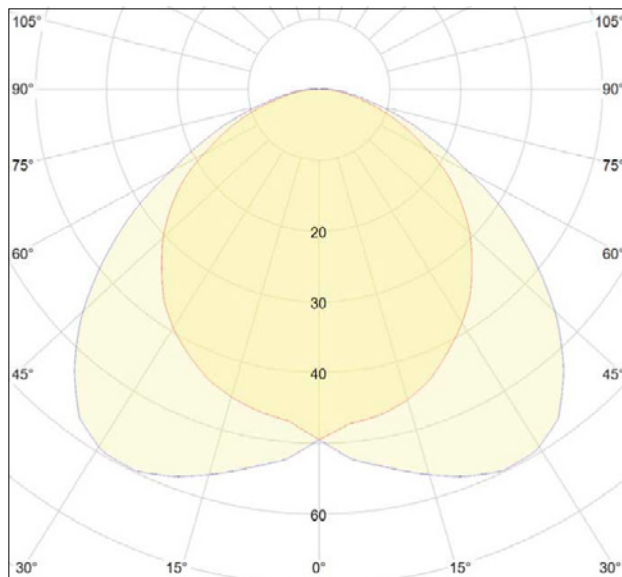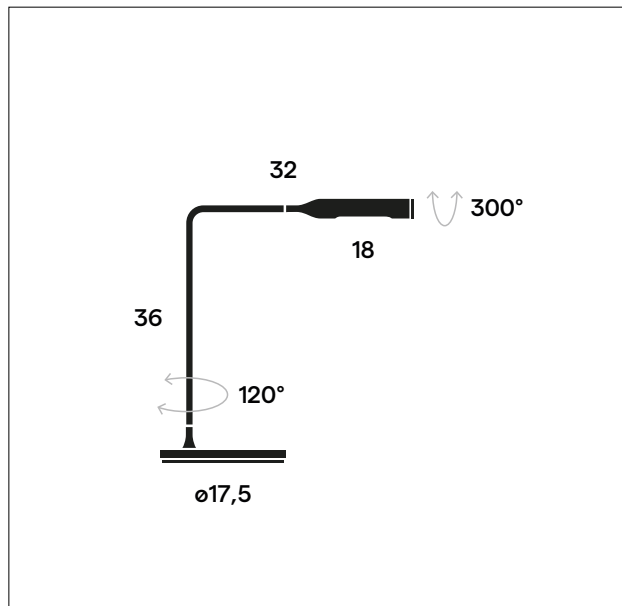

# Flo Bedside



Design: Foster + Partners, 2011



LED light for bedside, in varnish coated aluminium and steel. Its head rotates by 300° for direct lighting, the arm pivots on base by 120°. 3W-LED which you can switch on with one click for full light intensity, with two clicks for half light intensity.

## Finishing

### Standard

 Black soft touch  
cod. 95001STK27

 Matt white  
cod. 95002OPK27

 Brushed nickel  
cod. 95044K27

### Special

 Matt red  
cod. 95003OPK27

 Matt yellow  
cod. 95005OPK27

 Metallic bronze  
cod. 95029MTK27

 Gunmetal  
cod. 95032K27

All RAL coating and galvanic finishes available upon request

## Light emission



- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 250 lm
- Emitted flux: 140 lm
- Efficacy: 28 lm/W
- CCT: 2700K
- CRI index: >90
- LLMF: 50000 h L70

## Electrical Facts

- Source power: 3 W
- Power absorption: 5 W
- Stand-by absorption: < 1 W
- Grid voltage: 100 – 240 V AC / 50-60 Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: internal push dimmer
- Energy class: A++

## Technical data

- Environment: indoor
- Placement: table
- Net weight: 1,65 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

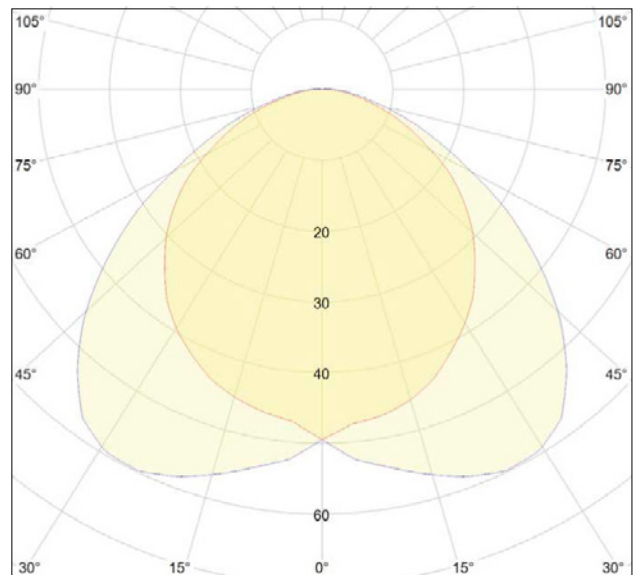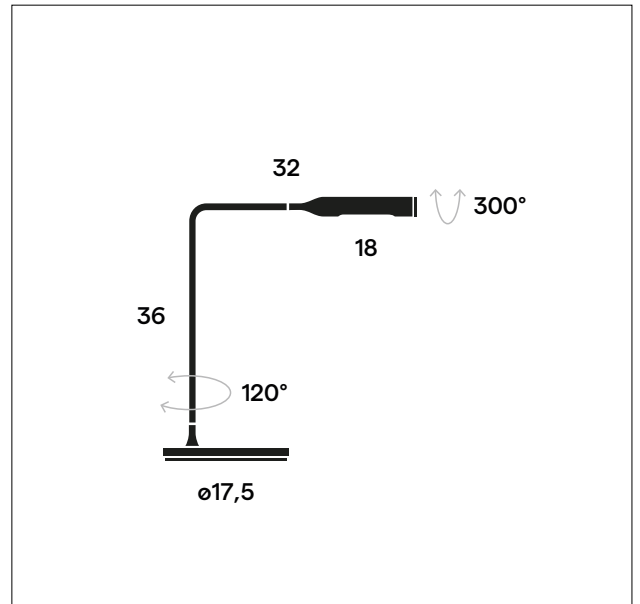

Packaging  
cardboard box  
46 x 40 x 8 (cm)  
0,013 m<sup>3</sup>

Gross weight  
2,4 Kg